


50Watt Photovoltaic module

BP 350J

10 4073E-2 01/10

The BP 350J is part of the BP Solar Poly 3-Series. It is an advanced 50W photovoltaic module with 12V nominal power output, making it ideal for battery charging applications. It addresses the needs of various battery based applications, such as caravan, boats, homes that do not have access to the utility grid and rural electrification. Other appliances are in remote industrial applications such as telemetry, security sensors and instrumentation systems. The 72 cells in two parallel string in series and offer improved efficiency even under low light conditions through the use of advanced SiN coating. It has proven performance at high temperatures and its robust design makes the product durable in the field in almost any climate. This module has undergone the most rigorous testing to ensure reliable long term performance. The junction box is prepared with screw type terminals for flexible installation. There are two precasted holes for each size of cable glands, as ½" and M20.

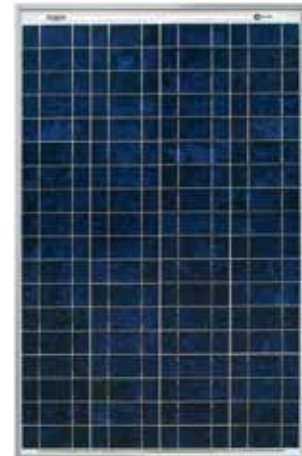

BP 350J

Performance

Rated power	50W
Tolerance	±10%
Module efficiency	11.1%
Nominal voltage	12V
Warranty*	93% power output over 12 years 85% power output over 25 years Free from defects in materials and workmanship for 5 years

*Refer to BP Solar's Warranty document for terms and conditions.

Qualification test parameters

Temperature cycling range	-40°C to +85°C for 200 cycles.
Damp heat test	85°C and 85% relative humidity for 1000h.
Front & rear load test (eg: wind)	2400Pa (equivalent to 245kg/m ² load distributed).
Front load test (eg: snow and wind)	5400Pa* (equivalent to 550kg/m ² load distributed).
Hailstone impact test	25mm hail at 23m/s from 1m distance.

*When mounted in accordance with BP Solar's installation instructions.


Quality and safety

- Conforms to European directives.
- Certified according to the IEC 61215 (Crystalline silicon terrestrial photovoltaic modules – Design qualification and type approval) and to the IEC 61730 (Photovoltaic module safety qualification, requirements for construction and testing).
- Listed to UL 1703 Standard for Safety by Intertek ETL (Class C fire rating).
- Approved by Intertek ETL for use in Class 1, Division 2, Groups A to D hazardous locations.
- Module electrical measurements are calibrated to world radiometric reference via third party international laboratories.
- Manufactured in ISO 9001 and ISO 14001 certified factories.
- This data sheet complies with the requirements of EN 50380.

Efficiency (%)

9 - 10	10 - 11	11 - 12	12 - 13	13 - 14
--------	---------	---------	---------	---------


BP 350J I-V Curves

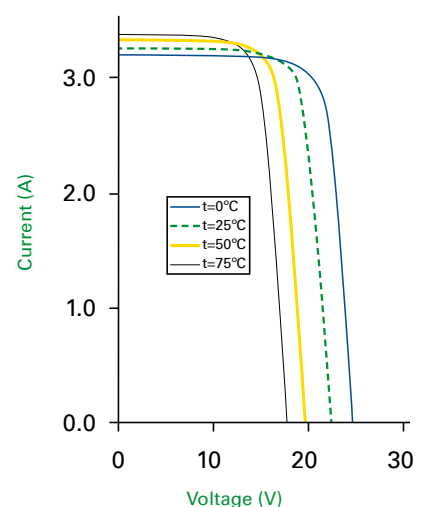

50Watt Photovoltaic module BP 350J

10 4073E-2 01/10

Module diagram

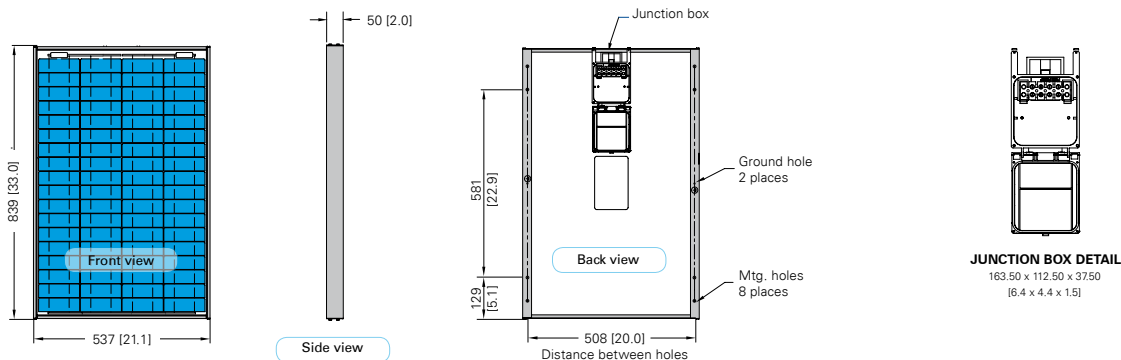

Electrical characteristics

	1000W/m ² (STC ¹)	800W/m ² (NOCT ²)
Maximum power (P _{max})	50W	36W
Voltage at MPP (V _{mpp})	17.5V	15.6V
Current at MPP (I _{mpp})	2.9A	2.3A
Short circuit current (I _{sc})	3.2A	2.6A
Open circuit voltage (V _{oc})	21.8V	19.8V
Efficiency reduction at 200W/m ²	<5% reduction (efficiency 10.5%)	
Limiting reverse current	3.2A	
Temperature coefficient of I _{sc}	(0.065±0.015)%/K	
Temperature coefficient of V _{oc}	-(0.36±0.05)%/K	
Temperature coefficient of P	-(0.5±0.05)%/K	
NOCT ³	47±2°C	
Maximum series fuse rating	8A	
Maximum system voltage	50V	
Application class (according to IEC 61730)	Class C	

¹STC: Standard test conditions - irradiance of 1000W/m² at an AM1.5G solar spectrum and a temperature of 25°C.

²800W/m², NOCT, AM 1.5G solar spectrum.

³NOCT: Nominal Operation Cell Temperature Sun 800W/m²; Air 20°C; wind speed 1m/s.


Mechanical characteristics

Solar cells	72 polycrystalline cells (42mm x 125mm) connected in series in 2 parallel strings of 36.
Front Cover	High transmission 3.2mm tempered glass.
Encapsulant	EVA
Back Cover	White polyester.
Frame	Silver anodised aluminium.
Diodes	One 9A, 45V Schottky bypass diode included.
Junction Box	BP J-type junction box: IP 65 junction box with 4 terminal screw connection block, accepts PG13.5, M20, 13mm conduit, or cable fittings accepting 6-12mm diameter cable. Terminals accept 2.5-10mm ² wire. Certified to meet UL1703 flammability test.
Dimensions	839 x 537 x 50mm / 33.0 x 21.1 x 2.0in
Weight	6kg / 13.2lbs

All dimensional tolerances within ±1% unless otherwise stated.

This publication summarises product warranty and specifications which are subject to change without notice. All solar modules are individually tested prior to shipment. During the stabilization process that occurs during the first few months of deployment, module power may decrease by approx. 1% from typical P_{max}.

Your BP Solar distributor:



©BP Solar 2010

www.bpsolar.com